



MOMENTIVE
performance materials

Silicone Solutions for Mold Making



Mold Making Applications

Rapid Prototyping / Precision Molding

Momentive Performance Materials offers a line-up of addition cure Mold Making silicones for prototyping applications and molds for complex precision parts. These addition cure products offer tear strength, tensile strength, and elongation properties that help provide dimensional stability while contributing to durability and handling of the mold.

The addition type curing mechanism, which relies on temperature exposure to facilitate the curing process, helps to control shrinkage during cure which is important for parts with intricate and complex design characteristics. The family of addition cure silicones also includes oil-bleeding grades that help improve the demolding process.

Products are available in a variety of colors and appearances, ranging from solids to translucent and transparent grades. The translucent and transparent grades are candidates for split molds that are cut after cure, and require optical clarity of the molded part.



Art Reproduction, Craft, Figurines and Furniture

A portfolio of condensation cure molding silicones, which cure in reaction to exposure to atmospheric moisture, is offered for a variety of applications.


General purpose grades such as TSE350, TSE3502 and TSE3504 are available in low viscosities and provide ease of handling and use for basic Mold Making requirements.

For applications involving intricate objects or requiring increase mold durability, a range of high tensile and tear strength condensation cure grades is also available in an array of viscosities.





Product Selector Guide

Addition Cure Grades

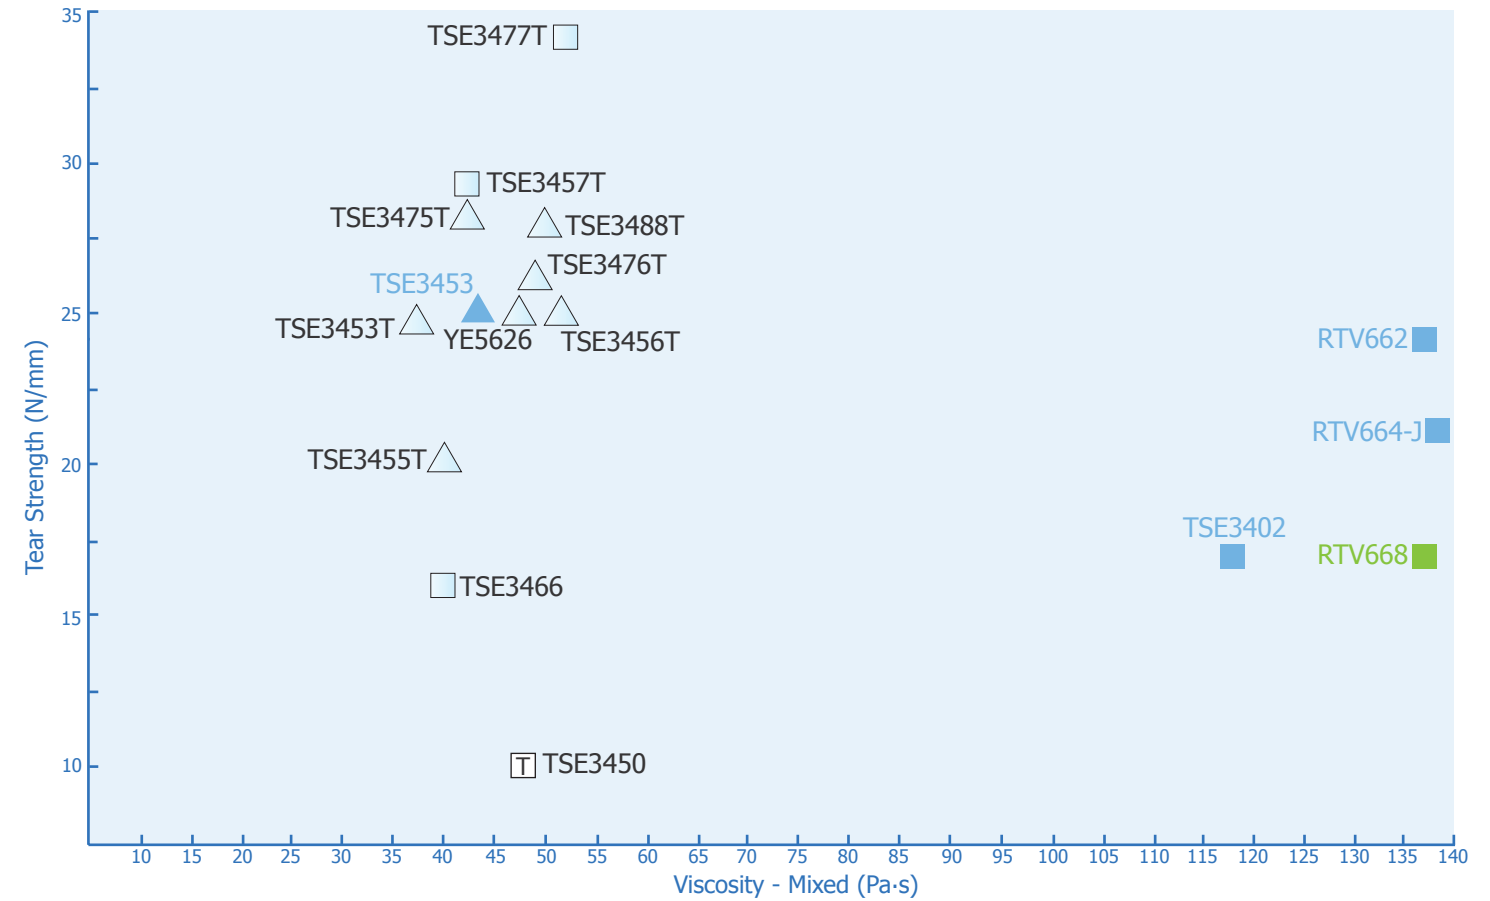

Condensation Cure Grades

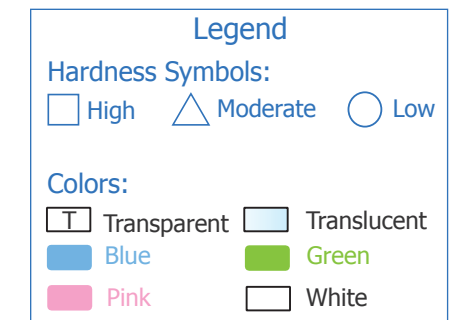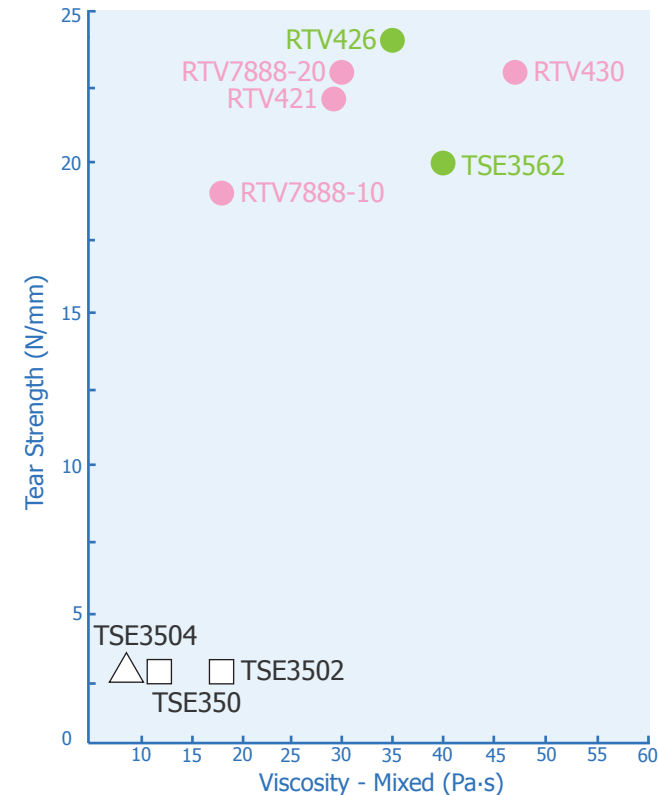

Addition Cure Product Details

Properties	High Hardness													Moderate Hardness																		
	RTV662		RTV668		RTV664-J		TSE3466		TSE3402		TSE3457T		TSE3477T		TSE3450		TSE3455T		TSE3488T		TSE3453		TSE3453T		YE5626		TSE3456T		TSE3475T		TSE3476T	
Features and Benefits	Highest hardness grade. Dimensional stability and extended worklife.		High hardness grade with dimensional stability. Demonstrates sulfur resistance.		High hardness grade. Dimensional stability, long worklife, and chemical & abrasion resistance.		High hardness and strength with low viscosity. Low shrinkage performance.		High hardness and strength. Low shrinkage performance.		High hardness and dimensional stability with good tear strength. Low shrinkage performance.		High tear strength & dimensional stability. Oil-Bleed assisted release performance. Low shrinkage		High transparency grade. High hardness and dimensional stability. Low shrinkage		Low viscosity and good tear strength. Low shrinkage performance		Good tear strength and transparency, long work life, and fast cure performance		Good tear strength and low shrinkage performance		Good tear strength and low shrinkage performance		Good tear strength. Low shrinkage performance		Good tear and tensile strength. Low shrinkage performance		High tear strength. Oil-Bleed assisted release performance. Low shrinkage		Good tear strength. Oil-Bleed assisted release performance.	
Oil Bleed Type													●															●	●			
Components	RTV662(A)	RTV662(B)	RTV668(A)	RTV668(B)	RTV664-J(A)	RTV664-J(B)	TSE3466(A)	TSE3466(B)	TSE3402(A)	TSE3402(B)	TSE3457T(A)	TSE3457T(C)	TSE3477T(A)	TSE3477T(C)	TSE3450(A)	TSE3450(B)	TSE3455T(A)	TSE3455T(B)	TSE3488T(A)	TSE3488T(F)	TSE3453(A)	TSE3453(B)	TSE3453T(A)	TSE3453T(B)	YE5626(A)	YE5626(B)	TSE3456T(A)	TSE3456(C)	TSE3475T(A)	TSE3475(C)	TSE3476T(A)	TSE3476(C)
Appearance	Beige	Blue	Beige	Green	Beige	Blue	Translucent	Transparent	Light Blue	Blue	Translucent	Transparent	Translucent	Transparent	Transparent	Transparent	Translucent	Transparent	Translucent	Transparent	White	Blue	Translucent	Transparent	Translucent	Transparent	Translucent	Transparent	Translucent	Transparent	Translucent	Transparent
Viscosity (23°C) Pa-s	150	5	151	3.8	153	6	55	0.3	130	1.2	56	2.5	62	3.0	70	1.5	45	1.5	90	0.5	60	3	50	2.3	60	1.0	88	3	68	1.0	70	1.4
Mixing Ratio (by weight)	10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1		10 : 1			
Viscosity (mixed) (23°C) Pa-s	137		137		139		40		118		42		52		48		40		50		45		42		48		50		42		48	
Pot Life (23°C) h	5		2.5		3		1.5		2		1.5		1		2		1.5		3		2		1		1.5		1		1		1.5	
Demold Time (23°C) h	24		24		18		24		24		24		24		24		24		72		24		24		24		24		24		24	
Appearance	Blue		Green		Blue		Translucent		Light Blue		Translucent		Translucent		Transparent		Translucent		Translucent		Light Blue		Translucent		Translucent		Translucent		Translucent		Translucent	
Specific Gravity (23°C)	1.26		1.26		1.26		1.10		1.25		1.10		1.10		1.02		1.10		1.08		1.10		1.09		1.09		1.09		1.09		1.08	
Hardness	68		62		62		60		60		47		45		45		41		40		40		40		40		39		37		37	
Tensile Strength MPa (psi)	7.0 (1015)		7.1 (1030)		6.4 (930)		7.4 (1075)		5.4 (785)		6.7 (970)		6.3 (915)		4.5 (650)		6.4 (930)		6.6 (960)		6.4 (930)		6.4 (930)		6.0 (870)		6.9 (1000)		5.7 (825)		6.0 (870)	
Elongation %	235		240		245		350		220		350		320		350		360		400		400		400		420		420		400		380	
Tear Strength ¹ N/mm (ppi)	24 (137)		17 (100)		21 (122)		16 (90)		17 (100)		29 (165)		34 (194)		10 (57)		20 (114)		28 (160)		25 (142)		25 (142)		25 (142)		25 (142)		29 (165)		26 (148)	
Linear Shrinkage (23°C, 24h) %	<0.2		<0.2		<0.2		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1		<0.1			
1.0 lb. (454g) kit	●		●																													
11 lbs. (5kg) kit					●																											
44 lbs. (20kg) kit	●		●		●																											
495 lbs. (225kg) kit	●		●		●																											
100g bottle							●			●				●				●						●								
600g bottle								●																		●						
1kg can							●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1.8kg can																									●							
10kg pail											●	●	●	●			●				●						●				●	
18kg pail							●		●																●							
20kg pail							●				●		●	●	●		●		●		●		●	●			●		●			
180kg drum							●																									
200kg drum													●										●									
Catalyst Alternatives											TSE3457(D) (machine mixing)	TSE3477(D) (machine mixing)							TSE3488T (E) (fast cure)			TSE3453T (D) (machine mixing)			TSE3456 (D) (machine mixing)	TSE3475 (D) (machine mixing)	TSE3476 (D) (machine mixing)					

¹ Crescent method

Typical property data values should not be used as specifications

Cure Inhibition

Cure inhibition may occur with addition cure Mold Making silicone, depending on the materials that come into contact with the silicone during cure. Surfaces containing water, sulphur, nitrogen compounds, organic metal compounds or phosphate compounds may inhibit cure.


Cure inhibition is characterized by a gummy or sticky appearance of the silicone at the interface between the silicone and the offending substrate. Inhibition can be prevented by application of a barrier coat, cleaning of the offending material prior to application of silicone, or selection of a condensation cure Mold Making grade.

Condensation Cure Product Details

		High Hardness				Moderate Hardness		Low Hardness												
Properties		TSE3502		TSE350		TSE3504		RTV430		TSE3562		RTV426		RTV7888-20		RTV421		RTV7888-10		
Features and Benefits		General purpose material with low viscosity and good release properties.		General purpose material with low viscosity and good release properties.		General purpose material with low viscosity and good release properties. Fast demold performance.		High tear strength, dimensional stability, and thermal resistance.		Good tear strength and material durability.		High tear strength material, with fast demold performance.		High tear strength.		High tear strength. Good material flexibility. Fast demold performance.		Low viscosity material with good tear strength.		
Uncured Properties	Components	TSE3502	CE62	TSE350	CE62	TSE3504	CE62	RTV430	Beta 5	TSE3562(A)	TSE3562(B)	RTV426	Beta 26	RTV7888-20	Beta 16		RTV421	Beta 16	RTV7888-10	Beta 16
	Appearance	White	Red	White	Red	White	Red	White	Red	White	Green	Beige	Green	White	Red		Beige	Red	White	Red
	Viscosity (23°C) Pa-s	20	-	12	-	10	-	55	0.05	45	-	40	0.021	42	0.03		40	0.03	29	0.03
	Mixing Ratio (by weight)	100 : 0.5		100 : 0.5		100 : 0.5		10 : 1		10 : 1		10 : 0.5		10 : 1			10 : 1		10 : 1	
	Viscosity (mixed) (23°C) Pa-s	18		10		10		47		40		35		30			29		18	
	Pot Life (23°C) h	1		1		0.5		3		1		2		1.5			1.5		1.5	
	Demold Time (23°C) h	24		24		8		12		24		4.6		24			12		24	
Cured Properties	Appearance	Stone White		Stone White		White		Pink		Light Green		Green		Pink			Pink		Pink	
	Specific Gravity (23°C)	1.48		1.18		1.22		1.09		1.09		1.11		1.22			1.23		1.22	
	Hardness	60		47		40		30		28		25		20			18		12	
	Tensile Strength MPa (psi)	4.9 (710)		2.5 (365)		2.5 (365)		3.1 (450)		4.2 (610)		3.3 (485)		3.4 (500)			3.6 (530)		2.75 (400)	
	Elongation %	130		170		170		300		400		310		350			400		450	
	Tear Strength ¹ N/mm (ppi)	3 (17)		3 (17)		3 (17)		23 (130)		20 (114)		24 (137)		23 (130)			23 (130)		19 (110)	
	Linear Shrinkage (23°C, 24h) %	<0.1		<0.1		<0.1		<0.5		<0.3		<0.05		<0.14			<0.2		<0.17	
Packaging	10g bottle		●		●		●													
	100g bottle		●		●		●				●									
	1 pint (568ml) bottle												●		●			●		●
	900g can										●									
	1kg can	●		●		●				●										
	2 quart (2.3ltr) bottle								●				●		●			●		●
	2 quart (2.3ltr) can														●			●		●
	1 gal (3.8ltr) pail								●				●		●			●		
	18kg pail										●									
	5 gal (19ltr) pail								●				●	●				●		
	20 kg pail	●		●		●														
	6 gal (22.8ltr) pail														●	●			●	●
	180kg drum										●				●				●	●
	55 gal (209ltr) drum								●				●		●			●		●
Catalyst Alternatives		CE60 (red) Fast cure		CE60 (red) Fast Cure		CE60 (red) Fast Cure		Beta 11 (blue) High-flexibility		TSE3562(F) Fast demolding				Beta 17 (clear) Fast demolding				Beta 17 (clear) Fast demolding		
		CE61 (red-brown) Slow cure		CE61 (red-brown) Slow Cure		CE61 (red-brown) Slow Cure								Beta 18 (red) Low hardness				Beta 18 (red) Low hardness		

¹ Crescent method

Typical property data values should not be used as specifications

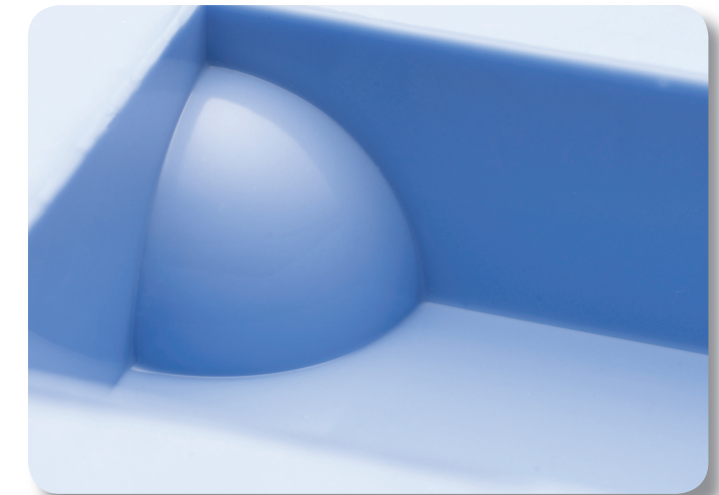

Accessory Products

Inhibitors

Inhibitors serve to increase the working time of mixed Mold Making silicones by delaying the rate of cure. However, high inhibitor concentrations can affect post-cure material properties, making a preliminary test essential.

Inhibitor Grade	ME75	ME70
Compatible Silicone Type	Addition Cure	Condensation Cure
Appearance	Colorless, Transparent	Colorless, Transparent
Typical Concentration wt%	0.01 - 0.5	0.1 - 1.0
Pkg	100g bottle	
	1kg bottle	

Thinners

Thinners are dilution additives that reduce the viscosity of Mold Making silicones, and also lower post-cure hardness and modulus.

Thinner Grade	ME91	ME90	SF97-50
Compatible Silicone Type	Addition Cure	Condensation Cure	All
Appearance	Transparent	Transparent	Transparent
Viscosity (25°C)	3.0 (Pa-s)	-	50 (cstk)
Typical Concentration wt%	0.1 - 20.0	0.1 - 20.0	~ 7.0
Pkg	1.0 lb. (454g) bottle		
	1kg bottle		

Thixotropic Agent

SF1188A can be used as a thixotropic agent with condensation cure products, and is typically used to allow the mold making silicone to be applied to vertical surfaces.

Thixotropic Agent	SF1188A
Color	Clear to straw
Viscosity (25°C) cstk	800-1400
Specific Gravity (25°C)	1.04
Typical Concentration wt%	~3.0

Color Master

Color Master Grade	ME50-B	ME50-G	ME50-M	ME50-R2	ME50-Y
Color	Black	Gray	Blue	Red Brown	Yellow
Viscosity (25°C) Pa-s	200	150	800	250	800
Typical Concentration wt%	2.0	2.0	2.0	2.0	2.0
Pkg	1kg can				

Performance Examples

ME75 (Addition Cure)	Ratio 1	Ratio 2	Ratio 3
YE5626 (A) wt	100	100	100
YE5626 (B) wt	10	10	10
ME75 wt	0	0.2	0.4
Viscosity (120 min. at 25°C) Pa-s	120	85	65

ME70 (Condensation Cure)	Ratio 1	Ratio 2	Ratio 3
TSE3562 (A) wt	100	100	100
TSE3562 (B) wt	10	10	10
ME70 wt	0	0.5	1.0
Viscosity (60 min. at 25°C) Pa-s	100	90	55
Viscosity (70 min. at 25°C) Pa-s	190	125	60

Performance Example

ME90 (Condensation Cure)	Ratio 1	Ratio 2	Ratio 3	Ratio 4
TSE3562 (A) wt	100	100	100	100
TSE3562 (B) wt	10	10	10	10
ME90 wt	0	5	10	20
Viscosity (25°C) Pa-s	40	32	24	15
Hardness	30	27	24	20
Tensile Strength MPa (psi)	4.2 (610)	4.0 (580)	3.4 (495)	2.9 (420)
Elongation %	400	420	390	390
Tear Strength N/mm (ppi)	20 (114)	20 (114)	4 (23)	3 (17)

Model Sealer / Barrier-Coat

Model sealers help minimize cure inhibition of addition cure Mold Making material, and is applied as a thin layer (0.01 - 0.02mm) to the master containing the offending substrate. Model sealers can also be used as a parting agent to aid mold release in addition cure two-part molds.


Model Sealer	SS4171P
Color	Blue
Specific Gravity (25°C)	0.84
Non-Volatile Content %	14
Dry Time min	30
Solvents	Acetone, Isopropanol, Xylene

Molding Processes


Seamless Simple Mold



Step 1: Place the master model on the mold board, and enclose on all four sides with a frame. Clay may be applied on the bottom of the master to securely attach it to the mold board.

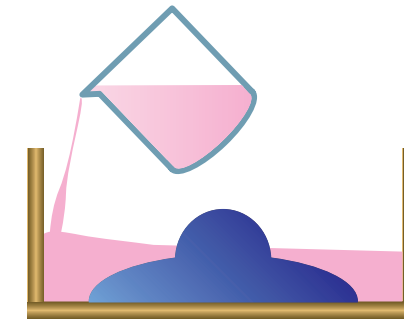


Step 4: Begin pouring the material, starting first at a low point in the mold. Allow the silicone to cure for the specified time.

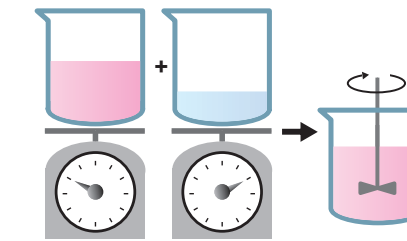


Step 2: Measure the base material and catalyst by weight as specified for the silicone grade selected. Thoroughly mix the components.



Step 5: After the silicone has cured, remove the mold walls, and gently release the master mold from the mold board. Release the master model from the silicone mold, and remove any flash that may have developed on the edges of the mold.

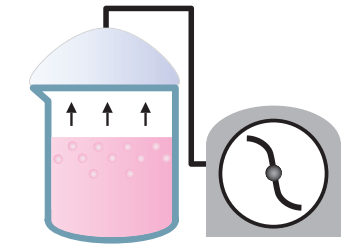


Step 3: Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container with adequate size (4 to 5 times) is required.

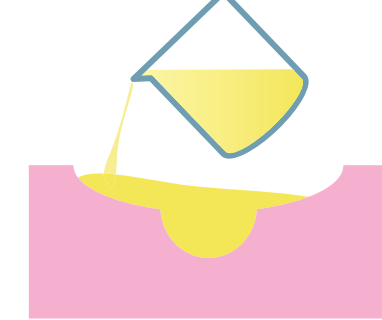

Step 6: Prepare the casting resin as specified by the manufacturer, pour into the silicone mold, and allow to cure.

Seamless Lost Wax Mold

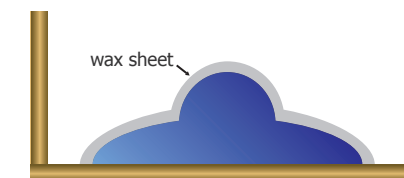


Step 1: Place the master model on the mold board, and enclose on all four sides with a frame. Apply a wax sheet on the master surface (thickness 0.5-1.0cm). Avoid using wax containing sulfur.




Step 2: Pour a base material (plaster, polyester, etc.) and allow to harden.




Step 3: Flip the mold and remove the wax layer and master model.

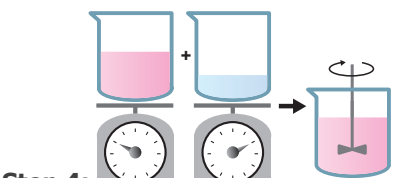

Step 4: Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

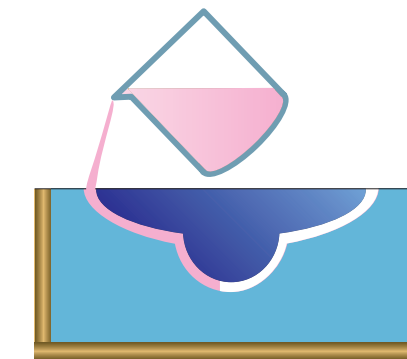


Step 5: Secure the master model to the mold so the base is flush with the base material. Pour silicone into the cavity between the base and master model. Cure the silicone according to the specified conditions.

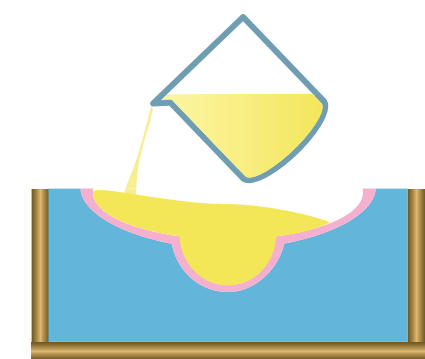


Step 6: Remove the master model. Prepare the casting resin as specified by the manufacturer, pour into the silicone mold, and allow to cure.

Mass-Cast Seam Line Mold


Mass casting a 3-dimensional part that does not have a flat side involves the creation of a part line in a split mold configuration. A split mold avoids "locking" the master model inside the silicone mold by pouring and curing the silicone Mold Making material in two steps. The ideal location for placing a part line depends upon the shape of the master part.

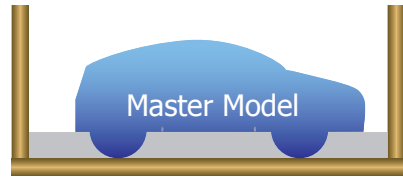


Step 1: Place the master model in the mold frame, and 2 parting line. The flat surface can be created by either milling a cavity in the mold board to the appropriate depth and shape, or by embedding the bottom of the master in clay.

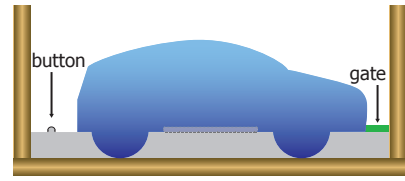


Step 2: Use a non-reactive and easy to use material, such as pattern wax, to create button indentations that will be used to allow the 2 halves to mechanically inter-lock and align. Using similar material, create a gate from the model to the frame. The gate will later be used to pour casting resin into the mold.

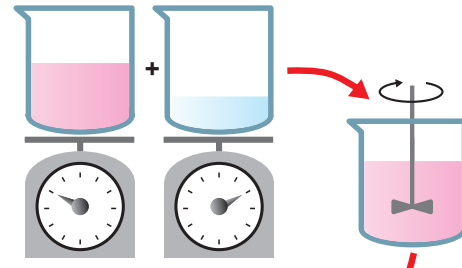


Step 3: Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

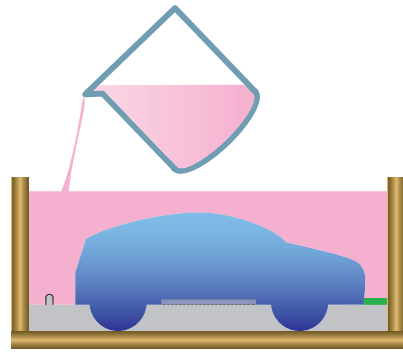


Step 4: Pour the silicone mixture, and allow to fully cure as specified. It is advisable to vacuum-degas once again after pouring, as some air will enter the silicone while pouring. After the silicone has fully cured, remove the frame from the base, and flip the mold to reveal the underside of the mold. Clean the parting line by removing clay that was used to create the parting line and any flash that developed. Also remove the wax material for the alignment mechanism.

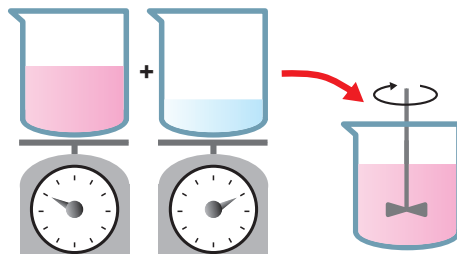


Step 5: Repeat step 3 to prepare the silicone material for the 2nd half of the mold.

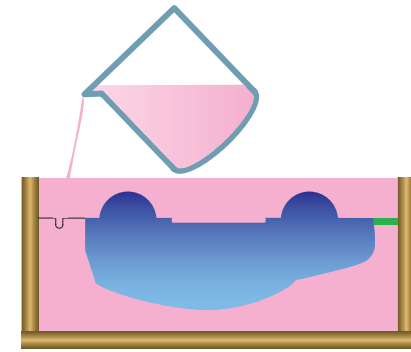


Step 6: Pour the mixed and degassed silicone to create the 2nd half. It is advisable to vacuum-degas once again after pouring, as some air will enter the silicone while pouring. Allow to fully cure as specified.

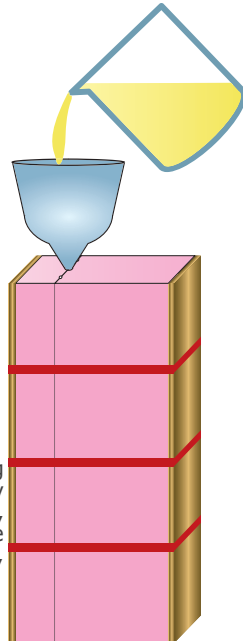

Step 7: Remove the frame and base, and gently pull apart the 2 halves to expose the model. Remove the model and clean as necessary. If air vents were not cast-in, cut vents into one of the halves.

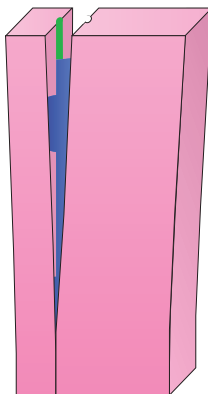


Step 8: Place the two halves together, using the alignment mechanism for precise positioning. Place boards on either side to avoid excess localization of pressure, and securely tape the mold.

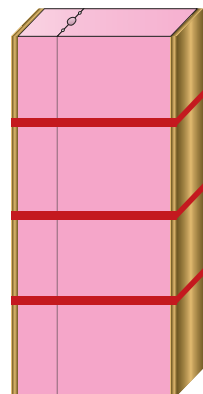


Step 9: Prepare the casting resin as specified by the manufacturer, pour into the silicone mold via the gate, and allow to cure.

Mass-Cast Seam Line Cut Mold


Mass casting a 3-dimensional part can also be accomplished by a single pour mold whose parting line is cut, rather than being created through two pouring processes. Parts that have a natural parting line that is conducive to cutting, are candidates for this process. The benefit of a cut mold is the reduction in cure time associated with the elimination of a 2nd pouring and curing process. Optical clarity of translucent or transparent molding grades aids the cutting process.

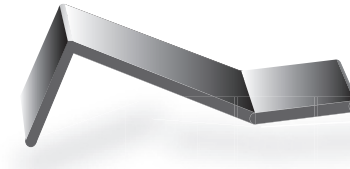


Step 1: Parts with a prominent natural parting line are candidates for mass-molding with a seam line and cut process. Tape may be applied to the edges to create a parting line away from the model, and aid the cutting process later.

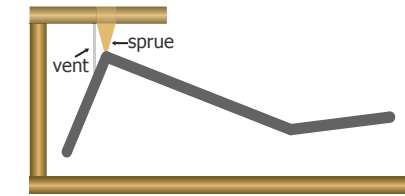


Step 2: Enclose the part in a frame. The part can be suspended by attaching a sprue, which will also serve as the gate for pouring resin in the completed mold. Cast air vents can be created by attaching physical connections such as wires, which will also help to stabilize the part while pouring.

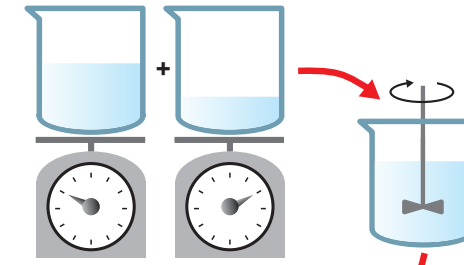


Step 3: Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

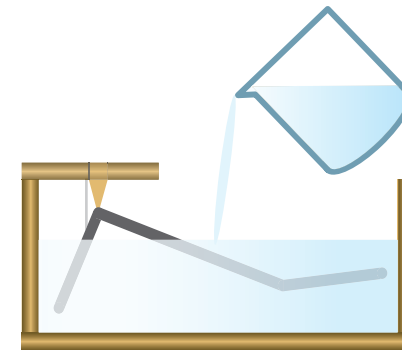


Step 4: Begin pouring the material, starting first at a low point in the mold. It is advisable to vacuum degas once again after pouring, as some air will enter the silicone while pouring. Allow the silicone to cure for the specified time and conditions.

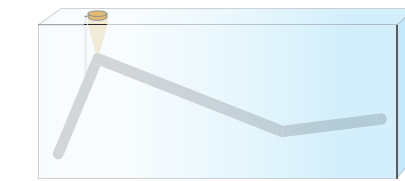


Step 5: After the silicone has cured, remove the frame and supporting structure. Remove any flash that may have developed along the edges.

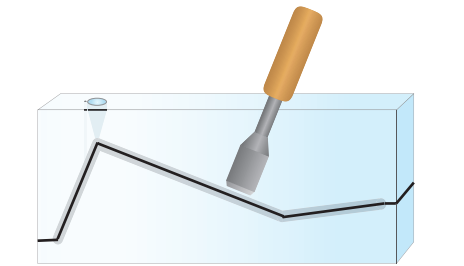


Step 6: Use a knife to cut along the part line. It is preferable that the cut is made in 2 to 3 passes, rather than attempting to cut to the part in a single cut. The pattern of the cut will create a natural alignment that will help when preparing the two halves for pouring resin.

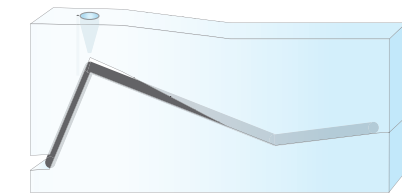

Step 7: Gently separate the 2 halves to expose the part. Remove the part, the sprue, cast-in air vent material, and any flash that may have developed around the gate and air vents.

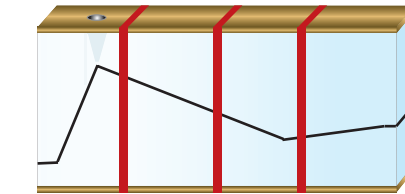

Step 8: Place the two halves together, using the cut parting line for alignment. Place boards on either side to avoid excess localization of pressure, and securely tape the mold.

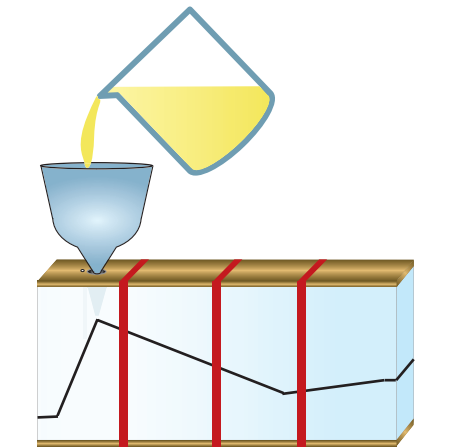

Step 9: Prepare the casting resin as specified by the manufacturer, pour into the silicone mold via the gate, and allow to cure.

Principal Locations

Regional Information	Phone	Fax
North America		
World Headquarters 187 Danbury Road Wilton, CT 06897, USA	800.295.2392	607.754.7517
Latin America		
Rodovia Eng. Constâncio Cintra, Km 78,5 Itatiba, SP - 13255-700 Brazil	+55.11.4534.9650	+55.11.4534.9660
Europe, Middle East, Africa and India		
Leverkusen Germany	00.800.4321.1000 +31.164.293.276	+31.164.241.750
Pacific		
Akasaka Park Building 5-2-20 Akasaka, Minato-Ku Tokyo 107-6112 Japan	+81.3.5544.3100	+81.3.5544.3101
Customer Service Centers		
North America		
Charleston, WV 25314, USA E-mail: cs-na.silicones@momentive.com	Specialty Fluids 800.523.5862	304.746.1654
	UA, Silanes, Resins, and Specialites 800.334.4674	304.746.1623
	RTV Products - Elastomers 800.332.3390	304.746.1623
	Sealants and Adhesives and Construction 877.943.7325	304.746.1654
Latin America		
Argentina and Chile	+54.11.4862.9544	+54.11.4862.9544
Brazil	+55.11.4534.9650	+54.11.4534.9660
Mexico and Central America	+52.55.5899.5132	+52.55.5899.5138
Venezuela, Ecuador, Peru, Colombia and Caribbean	+58.212.285.2149	+58.212.285.2149
E-mail: cs-la.silicones@momentive.com		
Europe, Middle East, Africa and India		
E-mail: cs-la.silicones@momentive.com	00.800.4321.1000 +31.164.293.276	+31.164.241.750
Pacific		
Japan	+81.276.20.6182	
China	+86.800.820.0202	
Korea	+82.2.6201.4600	
Singapore	+65.6220.7022	
E-mail: cs-ap.silicones@momentive.com		
Worldwide Hotline	800.295.2392	+607.786.8131
Worldwide Web	www.momentive.com	

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH & Co. KG, MOMENTIVE PERFORMANCE MATERIALS SUISSE Sarl, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.